

LED

# LED Profile 300

## 20°÷40°

**ON/OFF Version**

cod. **PRF-3002040-WW** 3150K

cod. **PRF-3002040-W** 6000K



### FEATURES:

- 230 V ac 50Hz, 300W
- 300W interchangeable LED Module
- Color temperature 3150 K and 6000 K
- CRI>95 and TLCI>90
- Adjustable zoom from 20° to 40°
- Manual zoom
- Power connections, Neutrik Powercon In&Out
- Heatsink with low noise fan, max 8 dB
- Profile system with 4 steel shutter blades included
- Filter frame included
- Gobo holder optional (AC819)
- Iris diaphragm optional (AC837)
- Aluminium and steel plate body. Scratch resistant black epoxy powder paint
- IP20
- Insulation class I
- Suitable to be fitted on normally inflammable surfaces



Zoom profile spotlight incorporating an interchangeable LED source, available in 2 different colour temperatures, 3150K and 6000K, on/off function.

The Profile's excellent optical performance and beam control is the result of Arena Luci's well proven high quality double condenser lens zoom optical system. Suitable for commercial applications, Museums, architectural, theatres and TV studios.


Focus adjustment slide controls for diameter (from 20° to 40°), perfect focus or softness beam outline.

Profile system with 4 steel shutter blades included.

Optional iris and gobo holder.

Housing in extruded aluminium and steel plate body.

Scratch resistant epoxy powder paint.

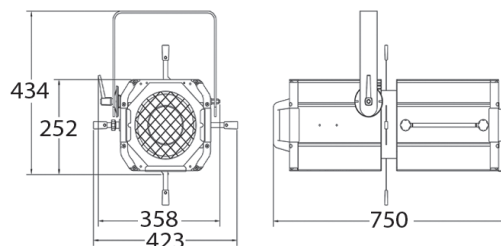

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso  
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice