



LED Profile 160

18°÷35°



DMX Version

- cod. PRF-1802035BD-WW 3000 K
- cod. PRF-1802035BD-NW 4000 K
- cod. PRF-1802035BD-W 5700 K

FEATURES:

- 230 V ac 50Hz, 160W
- 155W interchangeable LED Module
- Color temperature 3000 K, 4000 K and 5700 K
- CRI>95
- DMX 512 control + RDM function
- 1/2/3/4/5 selectable DMX Channels
- Adjustable zoom from 18° to 35°
- Manual zoom
- Linear dimmer 0-100%
- DMX dimmer
- Digital display
- Control connections, Neutrik XLR 5P In&Out
- Power connections, Neutrik Powercon In&Out
- Heatsink with low noise fan, max 8 dB
- Profile system with 4 steel shutter blades included
- Filter frame included
- Gobo holder optional (AC819)
- Iris diaphragm optional (AC837)
- Aluminium and steel plate body. Scratch resistant black epoxy powder paint
- IP20
- Insulation calss I
- Suitable to be fitted on normally inflammable surfaces





Profile160 DMX LED is a zoom profile spotlight incorporating a 155W LED source, available in 3 different colour temperatures, 3000K, 4000K and 5700K, dimmable with DMX standard or directly by digital display on board, RDM function. The Profile's excellent optical performance and beam control is the result of Arena Luci's well proven high quality double condenser lens zoom optical system.

Suitable for commercial applications, Museums, architectural, Theatres and TV studios. Focus adjustment slide controls for diameter (from 18° to 35°), perfect focus or softness beam outline.

Profile system with 4 steel shutter blades included.

Optional iris and gobo holder.

Housing in extruded aluminium and steel plate body. Scratch resistant epoxy powder paint.

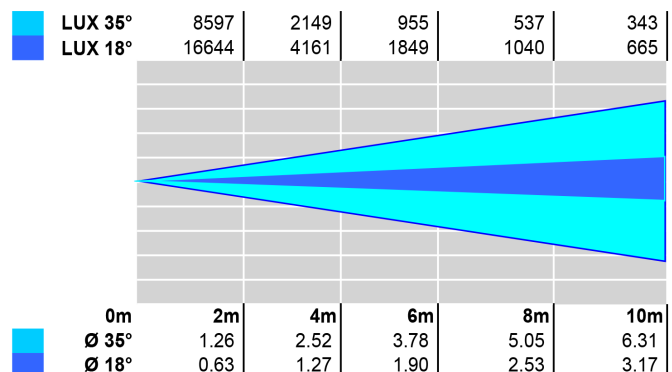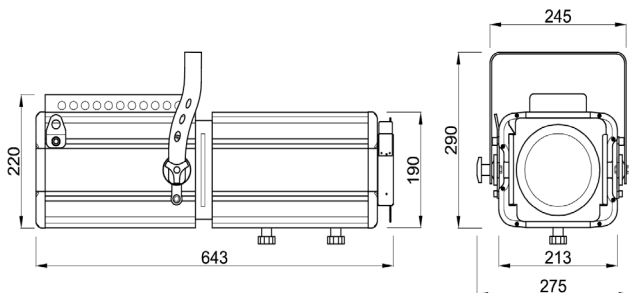

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice