



MAGMA FOG 1500 IP

SPECIFICATIONS / TECHNICAL DATA REV A

SPECIFICATIONS

PERFORMANCE

Rated Power: 1500W

Max Output: 60,000 CFM* (cu ft/min.)

Ready Time: Initial = 14 Minutes*

Fluid Capacity: 1.32 gallons (5 liters)

Fluid Consumption: 6.76 oz/min (200 ml/min)

*approximate

COMPATIBLE FLUID

Atmosphy Extreme Filtered Fog Fluid (AEF-2L, AEF-4L, AEF-20L)

CONSTRUCTION

Thermally Protected Heat Exchanger

Rugged Case Design

Convenient Carry Handles

CONTROL

3 DMX Channel Modes (1 / 2 / 4)

Onboard LCD Touch Control Panel

DMX-512 and RDM Protocol Support

Optional MAGFLY Wireless DMX Transceiver

Optional MAGRF Wireless and MAGREMOTE Wired Remotes

CONNECTIONS

Locking 5pin XLR Connector, DMX In/Out

IP65 Locking Power Connector In

With Wired Digital Communication Network

SIZE / WEIGHT

Length: 24.7 in. (628mm)

Width: 13.3 in. (337mm)

Height: 16.2 in. (411mm)

Weight: 55.1 lbs. (25kg)

ELECTRICAL

AC120V 60Hz (US Version)

AC230V 50Hz (EU Version)

20A @ 120VAC(NFB)

10A @ 230VAC - 240VAC

Max Power Consumption: 1600W



MAGMATIC



MAGMA FOG 1500 IP

SPECIFICATIONS / TECHNICAL DATA REV A

THERMAL

Maximum Ambient Temperature (Ta max) 104°F (40°C)
Exterior Surface Temperature, Steady State: 149°F (65°C)

APPROVALS / RATINGS


CE | IP65

What's Included

- . 14 AWG Locking Power Cable
- . Hanging Bracket

Optional Accessories

- . MAGFLY Card
- . MAGAPP Card
- . MAG-RF Card
- . MagRemote

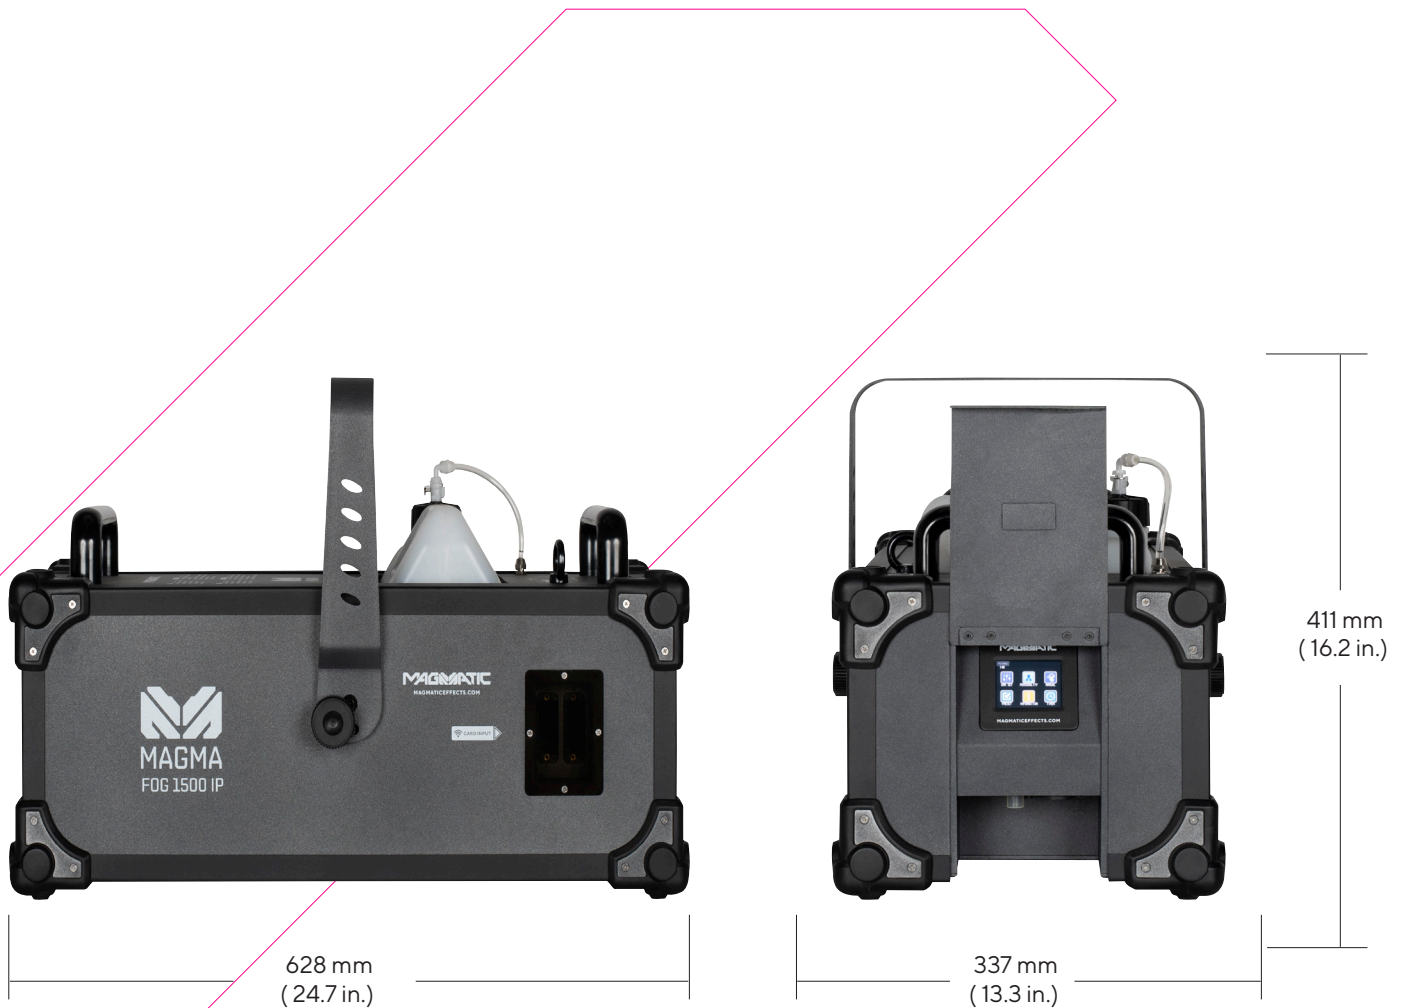

MAGMATIC